


Smart, Reliable  
**Innovative**  
solutions



SECONDARY  
SLITTER REWINDER  
**PCW**

  
**Kalpvrux**  
CONVERTING PRODUCTS  
PRIVATE LIMITED

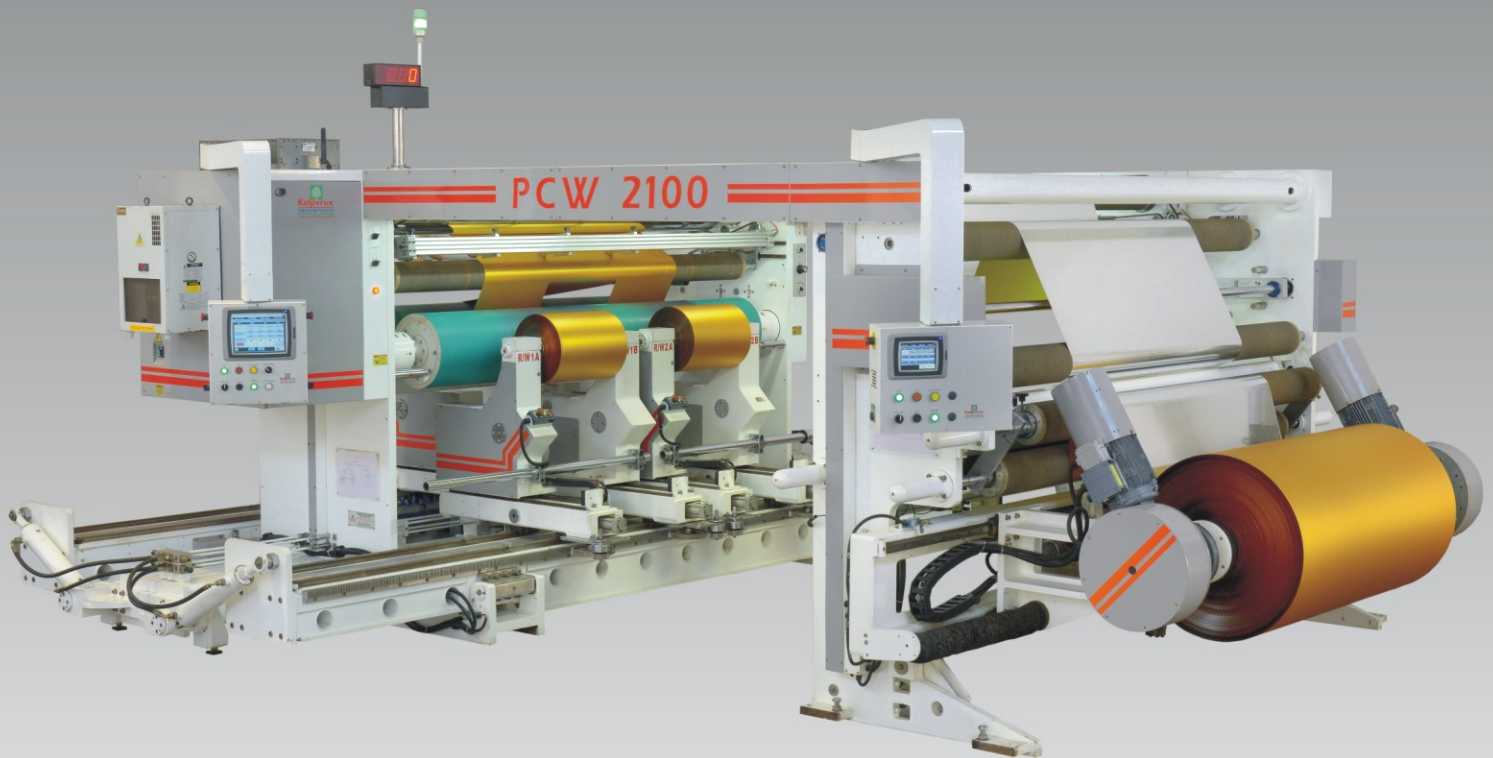

## MACHINE SPECIFICATIONS

Substrate	PET, BOPA, BOPP, CPP & Other films from 10-200 Microns
Web Width	1.6 mtr to 3.6 mtr
Unwind Diameter	1200 mm, 1500 mm (Option)
Unwind Core Internal Diameter	76 mm, 152 mm
Rewind Diameter	800 mm, 1000 mm (Option)
Rewind Core Internal Diameter	76 mm, 152 mm
Production Speed*	600 MPM, 800 MPM (Option)

\*Speed Depends upon the Substrate Quality, Slit Width & Core Quality



C1/B-642, GIDC Makarpura, Nr. GCEL, Baroda-390 010, Gujarat, INDIA

Tel : +91-265-3924846 / 3924847 / 3924848 | E-mail : marketing@kalpvrux.com, overseas@kalpvrux.com

www.kalpvrux.com